




1K/2K/3K/1KL/2KL/3KL



KEY FEATURES

- True double-conversion design with high adaptability to harsh mains conditions
- Output power factor 0.9
- DSP design enables precise and reliable control
- Compact size and ideal solution for Kiosk backup power
- High efficiency results in energy saving
- Programmable LCD display
- Recharge to 90% battery capacity within 4 hours
- USB HID enables communication without software

Typical Application

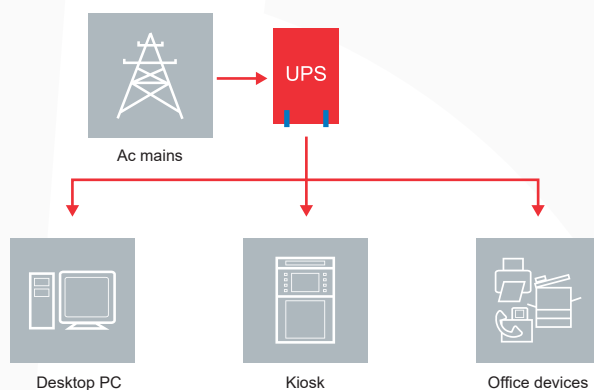

Specification

Model		Innova G 2 1K	Innova G 2 1KL	Innova G 2 2K	Innova G 2 2KL	Innova G 2 3K	Innova G 2 3KL
Capacity		1000VA/900W		2000VA/1800W		3000VA/2700W	
Input	Input Voltage Range	100 ~ 300 V _{AC}					
	Frequency Range	45 Hz– 55 Hz/54 Hz – 66 Hz					
	Input Wiring	Single phase with ground					
	Current Distortion (THDi)	<5% (typical) @ 100% linear load					
Output	Output Power Factor	0.9					
	Nominal Output Voltage	220/230/240V _{AC}					
	Voltage Regulation	±2 %					
	Frequency Range (Battery Mode)	50 / 60 ± 0.05Hz					
	Current Crest Ratio	3:1					
	Voltage Distortion (THDv)	<1% @ linear load, <5%@ non-linear load					
	Output Waveform	Pure sine wave					
	Parallel Operation	N/A					
Efficiency	Inverter Mode	>88%		>90%		>90%	
	ECO Mode	>97%					
Battery	Battery Type	12V / 7Ah	N/A	12V / 9Ah	N/A	12V / 9Ah	N/A
	Number of Internal Battery	2	N/A	4	N/A	6	N/A
	Rated Battery Voltage	24V		48V		72V	
	Backup Time (@ Full Load)	>3.5 mins	N/A	>3.5 mins	N/A	>3.5min	N/A
	Recharge Time (to 90%)	4 hours	N/A	4 hours	N/A	4 hour	N/A
	Charging Current	1.5A	6A	1.5A	6A	1.5A	6A
Transfer Time	Battery Mode ↔ Inverter Mode	0ms					
	Inverter Mode ↔ Bypass Mode	4ms (typical)					
Display		Programmable LCD					
Audible Alarm		Yes					
Dimension	WxHxD	144x229x345mm	102x228x352mm	190x330x393mm	102x327x396mm	190x330x393mm	102x327x396mm
Net Weight		9.4 kg	3.76 kg	17 kg	6.00kg	22.2 kg	6.08kg
Environment	Operating Temperature	0~40 °C					
	Noise Level	40dB @ 1 meter				50dB @ 1 meter	
Interface	USB	Yes					
	Communication Slot	Optional					
	Emergency Power Off	Yes					